
Git Introduction

Source Code Management with Git

Peter J. Jones
✉ pjones@devalot.com
🐦 @devalot
<http://devalot.com>
OCTOBER 1, 2018



DEVALOT

Copyright © 2018 Peter J. Jones
Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International
Public License: <https://creativecommons.org/licenses/by-nc-sa/4.0/> To license
this work for use in a commercial setting contact Peter J. Jones.

Contents

Introduction to This Course	5
Source Code	5
1 Introduction to Source Code Management	7
1.1 The Core Principles of Change Management	7
1.2 The Power to Undo Changes	7
1.3 Audit Trails and Investigations	7
1.4 Reproducible Software	7
2 Git Introduction and Basics	9
2.1 Introduction to Git	9
2.2 Trees and Commits	12
2.3 Configuring Git	14
2.4 Adding, Renaming, and Removing Files	15
3 Reviewing and Editing the Commit History	19
3.1 Reviewing the Commit History	19
3.2 Revision Shortcuts	20
3.3 Fixing Mistakes	21
4 Improving Your Daily Workflow	25
4.1 Simplifying Common Commands with Aliases	25
4.2 Ignoring Build Artifacts	26
4.3 Saving Changes for Later Use (Stashing)	27
5 Branching	29
5.1 Branching Basics	29
5.2 Listing Differences Between Branches	32
5.3 Deleting Branches	35
5.4 Tagging	36
6 Merging	39
6.1 Merging Basics	39
6.2 Merge Conflicts	41

CONTENTS

6.3	Merging Remote Branches	43
7	Remote Repositories	45
7.1	Remote Repositories	45
7.2	Synchronizing Objects with Remotes	48
7.3	Tracking Branches	49
8	Centralizing and Controlling Access	51
8.1	Introduction to GitLab	52
8.2	Git Repositories on GitLab	53
8.3	Daily Workflow	54

Introduction to This Course

Source Code

The source code for this course can be found at the following URL:

<https://github.com/devalot/git>

What's In Store

Before Lunch	After Lunch
Introduction / History	Branching
Git Internals	Tagging
Daily Workflow	Merging
Undoing Things	Remotes

CONTENTS

Chapter 1

Introduction to Source Code Management

1.1 The Core Principles of Change Management

TBD

1.2 The Power to Undo Changes

TBD

1.3 Audit Trails and Investigations

TBD

1.4 Reproducible Software

TBD

Chapter 2


Git Introduction and Basics

2.1 Introduction to Git


2.1.1 Why Use a Source Code Control System?

- It's a time machine for code and assets
- Coordinate work among project contributors
- Track what changes went into which releases
- Record *why* something changed and who made the change

2.1.2 Centralized Systems: Subversion, Perforce, etc.

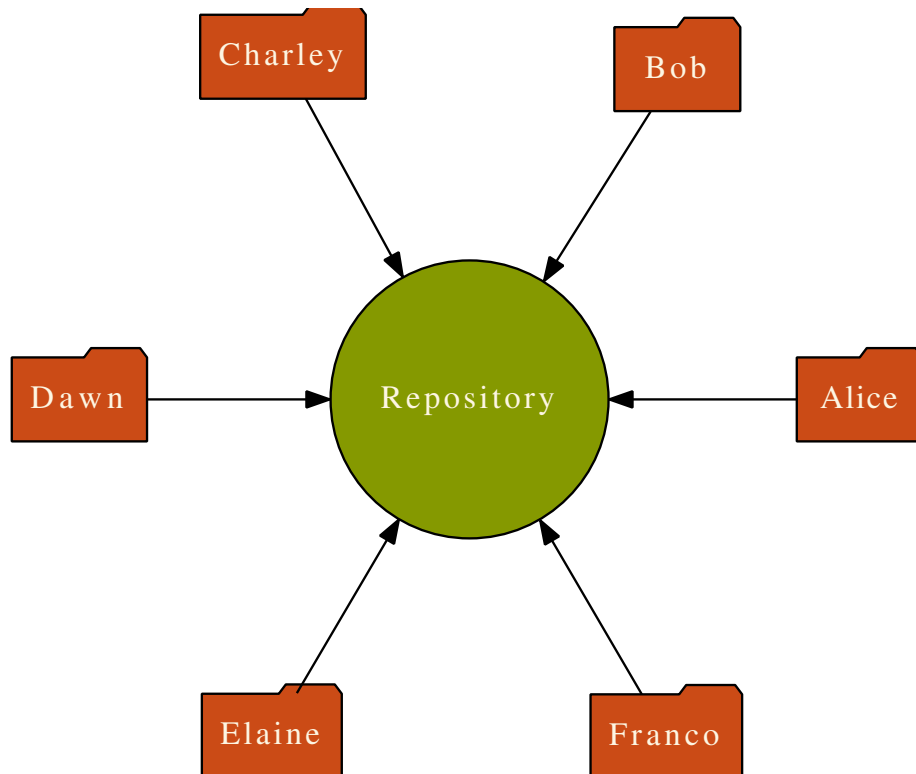

2.1.3 Distributed Systems: Git, Mercurial, etc.

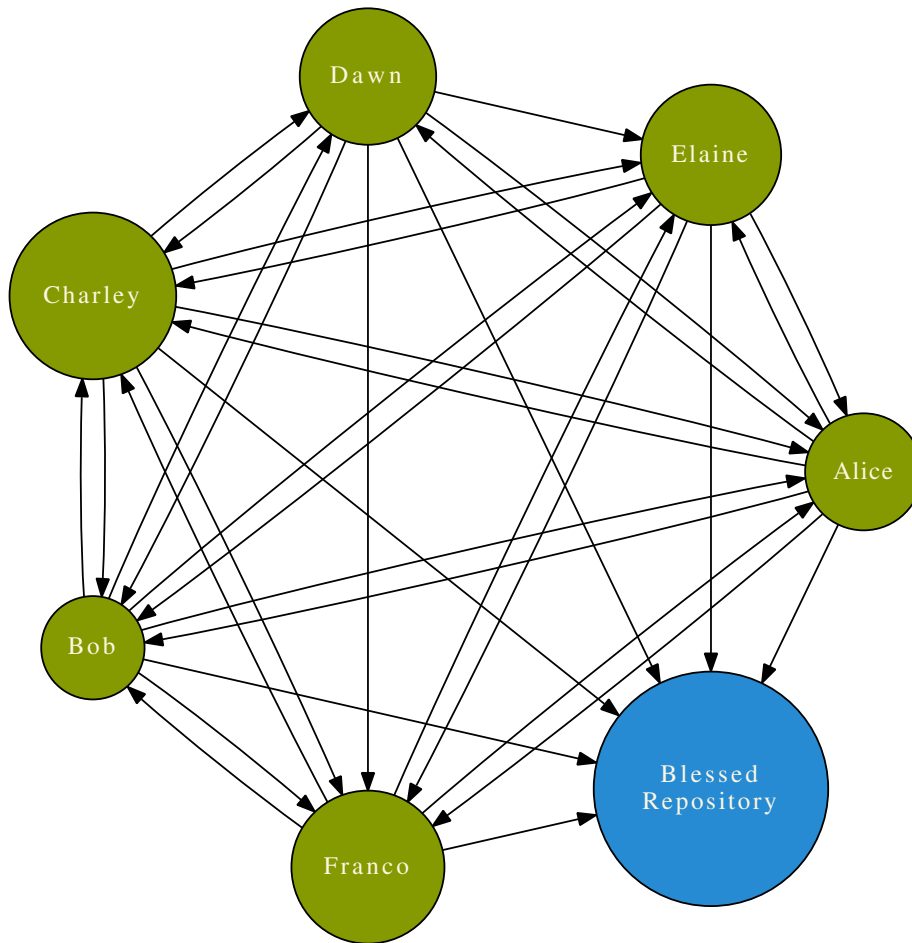

2.1.4 Centralized vs. Distributed

Feature	Centralized	Distributed
Checkout	Partial	Full Clone
Committing	Done on Remote	Local Only
Push/Pull	Automatic Push	Manual

2.2. TREES AND COMMITS

2.1.5 Patches vs. Snapshots

- Most version control systems use a set of patches (difference between a file before and after it was changed) and each set of patches is assigned an incremented ID.
- When a commit is made in Git it creates a new snapshot of the repository and assigns it a SHA1 hash
- The SHA1 hash is cryptographically secure and is used to verify the integrity of the repository
- Since the commit IDs do not follow one another numerically you have to use the `git log` command to see the commit order

2.2 Trees and Commits

2.2.1 Working Directory, Index, and Repository

The three “trees”:


Working Directory The project’s files as you and your tools see them.

The Index Changes that will be included in the next commit.


The Git Database (Repository) All commits, files, and history information.

(Note: The index is sometimes referred to as the *staging area*.)

2.2.2 Basic Git Workflow

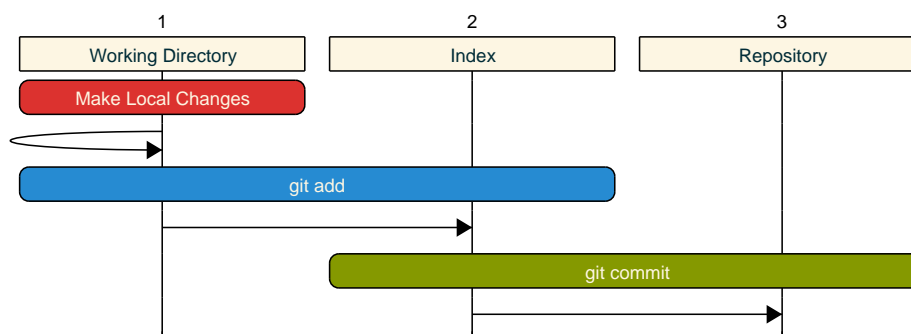

2.2.3 What is a Commit in Git?

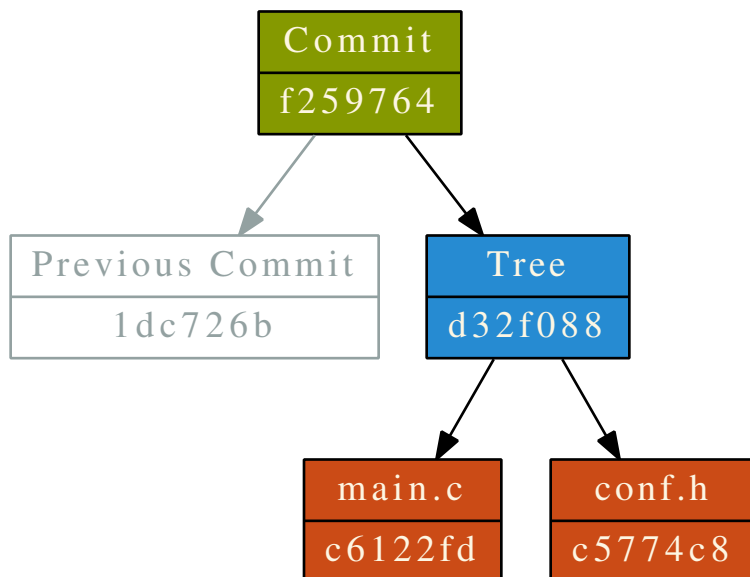

2.2.4 Starting Out: Cloning a Repository

To get a copy of an existing repository you *clone* it:

```
$ git clone <url>
```

2.2.5 Exercise: Cloning a Repository

1. Change to the following directory:
`repos`
2. Clone the `basic.git` repository:

```
$ git clone basic.git
```
3. This should have created a `basic` directory

2.2.6 Exercise: Viewing the History Log

1. Change to the directory holding a clone of the following repository:
`repos/basic.git`

2.3. CONFIGURING GIT

2. Use the following command to see the commit history:

```
$ git log --oneline
```

3. Pick a commit and run:

```
$ git cat-file -p <commit>
```

4. Also `cat-file` the listed tree, then the listed blob

2.3 Configuring Git

2.3.1 The `git config` Tool

All Git configuration information is stored in simple text files using the INI format. If you don't want to edit files by hand you can use the `git config` tool to do it for you.

2.3.2 Setting Your Name and Email Address

Before you do anything at all with Git you should tell it your name and email address. This information is recorded with each commit you make.

```
$ git config --global user.name "Your Name Here"
$ git config --global user.email "Your Email Address Here"
```

2.3.3 Exercise: Telling Git Who You Are

Goal: Ensure basic user settings are configured.

If you haven't done so previously:

1. Set you name and email address using `git config`
2. Verify your settings:

```
$ git config --list
```

2.3.4 Exercise: Telling Git Which Editor to Use

Goal: Ensure Git can use your favorite text editor.

If you haven't done so previously:

1. Tell Git which text editor to use:

```
$ git config --global core.editor <program>
```

Here are some examples for `<program>`:

- `emacs`
- `vi`
- `"'C:/Program Files/Notepad++/notepad++.exe'"`
- `"code --wait"`

Or search the web for instructions for your preferred editor.

2.4 Adding, Renaming, and Removing Files

2.4.1 Adding Untracked Files

- When you create a new file in the working directory Git will show the file as *untracked*
- You can see what Git thinks about a file using `git status`:

```
$ git status <file>
```
- To tell Git to start tracking the file use `git add`:

```
$ git add <file>
```
- This creates a commit object to hold the file
- If you change the file you need to use `git add` again
- To record your change to the repository use `git commit`:

```
$ git commit
```

2.4.2 Exercise: Adding a New File

Goal: Practice adding new files to a Git repository and seeing how Git responds at each step.

1. Change to the directory holding a clone of the following repository:

```
repos/basic.git
```
2. Create a new file called `config.h`
3. Add some content to the file (any text will do)
4. Review the output of `git status`
5. Add the file to the index
6. Check the output of `git status` again
7. Commit the change

2.4.3 Modifying Existing Files

Git knows when you have changed a file that it is tracking:

- The file will show as *modified* in a `git status`
- You can use `git diff` to see what has changed
- Stage the change with `git add`
- Commit the change with `git commit`

2.4.4 Exercise: Editing an Existing File

Goal: Practice editing files that are tracked by Git, seeing how Git responds, and then staging and committing those changes.

1. Change to the directory holding a clone of the following repository:

```
repos/basic.git
```

2. Edit the `main.c` file
3. Add some content to the file (any text will do)
4. Review the output of `git status`
5. Review the output of `git diff`
6. Add and commit the change

2.4.5 Renaming Files

Git allows you to rename files in two different ways:

1. Rename the file any way you want and let Git figure it out.
2. Use Git to rename the file:

```
$ git mv <old> <new>
```

When you rename files Git will track the rename in the repository.

(Note: If possible, using the `git mv` command is the safest way to rename a file.)

2.4.6 Exercise: Renaming a File

Goal: Practice renaming files with and without Git and see how it response along the way.

1. Change to the directory holding a clone of the following repository:

repos/basic.git

2. Rename the `config.h` file from the previous exercise to `init.h`
3. Review the output of `git status`
4. Notice that Git already staged the rename
5. Commit your change

2.4.7 Removing Files

When you no longer need a file you can remove it by:

1. Remove the file with any tool, then run `git rm`.

In this case `git status` will report that the file was deleted and `git rm` will stage the removal.

2. Use `git rm` directly.

The `git rm` command can delete the file and then stage the removal in one step.

2.4.8 Exercise: Removing a File

Goal: Practice deleting a file and then restoring it.

1. Change to the directory holding a clone of the following repository:

repos/basic.git

2. Remove the `init.h` file
3. Review the output of `git status`
4. Notice that the file deletion was staged for you
5. Commit your changes
6. Restore the file

2.4.9 Restoring a Removed File

You can always restore a file from a previous commit using the `git checkout` command:

`git checkout HEAD <file>` Restore <file> from the last commit

`git checkout HEAD^ <file>` Restore <file> from two commits ago

`git checkout 325a910 <file>` Restore <file> from commit 325a910

2.4. ADDING, RENAMING, AND REMOVING FILES

Chapter 3

Reviewing and Editing the Commit History

3.1 Reviewing the Commit History

3.1.1 Accessing the Commit Log

The easiest way to review the commit history is by viewing the output from the `git log` command. To get a compact commit listing use the following command:

```
$ git log --oneline
```

Try it out!

3.1.2 Getting More Detail from the Log

The Log command supports many options for controlling its output. The three most common ways of calling it are:

1. Basic details with full commit message:

```
$ git log
```

2. Single line output with commit subject:

```
$ git log --oneline
```

3. Basic details with diff output:

```
$ git log --patch
```

3.2. REVISION SHORTCUTS

3.1.3 Customizing the Commit Log

We can also fully customize the output of the log command:

```
$ git log \
  --pretty=format:'%Cgreen%h%Creset %Cred%cd%Creset %Cblue%ae%Creset %s %d'
```

(Note: We'll see later how we can create aliases for these complicated commands.)

3.1.4 Searching for a Commit

The log command can be used to search the commit history for changes involving a string:

- Find commits that added or removed lines containing `printf`:

```
$ git log -G printf
```

- The same, but with regular expressions:

```
$ git log -G 's?printf'
```

- Must change the number of occurrences:

```
$ git log -S printf
```

3.1.5 The Reference Log

Git also keeps a temporary history file which tracks every change you make to `HEAD`. It's call the *reflog*:

```
$ git reflog
```

To see the history of all branches you've worked on:

```
$ git reflog --all
```

Reference log with dates:

```
$ git log -g --pretty=format:"%h %cd %gd %gs"
```

(Entries in the reflog are automatically removed after 90 days.)

3.2 Revision Shortcuts

3.2.1 Specifying Revisions

Examples of absolute revisions `f259764`, `feature`, `HEAD`, `@`

First parent of a commit `f259764^` or `f259764~1`

Grandparent of a commit f259764~2

Entries from the reflog master@{yesterday}, HEAD@{5}

Ranges (useful for generating diffs) 1cfd75c..0ee2723

3.2.2 Exercise: Using `git rev-parse`

1. Change to the directory holding a clone of the following repository:

```
repos/basic.git
```

2. Use the following command to see the commit history:

```
$ git log --oneline
```

3. Experiment with `git rev-parse`, for example:

```
$ git rev-parse HEAD
```

3.3 Fixing Mistakes

3.3.1 Fixing the Last Commit

You finish creating a commit and then realize:

- Forgot to add a file to the index
- You have typos in your commit message
- etc.

Before pushing the commit you can edit it:

```
$ git commit --amend
```

3.3.2 The Process of Amending a Commit

1. Add any missing files to the index
2. Run `git commit --amend`
3. Edit the commit message if necessary
4. Exit your text editor

(Note: If you want to remove a file from a commit you will need to perform a soft reset and create a new commit.)

3.3. FIXING MISTAKES

3.3.3 Exercise: Amending the Last Commit

Goal: Practice amending the previous commit in order to reword a commit message.

1. Change to the directory holding a clone of the following repository:

```
repos/basic.git
```

2. Create a branch that starts at the commit named `merge-start`

```
$ git checkout -b NAME merge-start
```

3. Take note of the last commit hash
4. Amend the last commit, changing the commit message
5. Notice that the most recent commit was rewritten

3.3.4 Unstaging a Modification or File

Have you ever staged a file by accident and then wanted to *unstage* it?

```
$ git reset HEAD <file>
```

Or:

```
$ git reset -- <file>
```

(Or, create an *unstage* alias. We'll do this later.)

3.3.5 Exercise: Unstaging a File

Goal: Practice using `git reset` to unstage a file that we no longer want to be part of the next commit. Later we'll see how to create an alias to act as a shortcut for this common task.

1. Change to the directory holding a clone of the following repository:

```
repos/basic.git
```

2. Create a branch that starts at the commit named `merge-start`

```
$ git checkout -b NAME merge-start
```

3. Edit the `main.c` file, making a simple change to it
4. Stage (`git add`) and unstage (`git reset`) the file

3.3.6 Restoring a Modified File

Have you ever changed a file and wanted to restore it back to how it was in the last commit?

```
$ git checkout -- <file>
```

What about its state two commits ago?

```
$ git checkout HEAD~2 <file>
```

3.3.7 Exercise: Restoring a File

Goal: Practice using `git checkout` to restore a file from the last commit.

1. Change to the directory holding a clone of the following repository:
`repos/basic.git`
2. In the last exercise we changed the `main.c` file, restore it back to its previous state

3.3.8 Exercise: Restoring a File

Goal: Practice using `git log` and `git checkout` to restore a file from any previous version.

1. Change to the directory holding a clone of the following repository:
`repos/basic.git`
2. Look through the commit history and find the commit that added a version number to `main.c`
3. Restore `main.c` to its content before the version number was added

3.3.9 Reverting a Commit

Sometimes an entire commit needs to be undone.

```
$ git revert <commit>
```

...will create a new commit that reverses the changes in `<commit>`

3.3.10 Exercise: Reverting a Commit

Goal: Practice using the `git revert` command to undo a specific commit and see how the repository's history changes.

3.3. FIXING MISTAKES

1. Change to the directory holding a clone of the following repository:
`repos/basic.git`
2. Create a branch that starts at the commit named `merge-start`
`$ git checkout -b NAME merge-start`
3. Edit the `main.c` file, making a simple change to it
4. Commit the change
5. Revert the commit you just created

Chapter 4

Improving Your Daily Workflow

4.1 Simplifying Common Commands with Aliases

4.1.1 What are Aliases

- Just like with your favorite shell, Git supports aliases.
- When you run a Git command, it will first be looked up as an alias
- For example:

```
$ git unstage main.c
```

Could be an alias for:

```
$ git reset HEAD -- main.c
```

4.1.2 Creating New Aliases

The easiest way to create an alias is with the `git config` command:

```
$ git config --global alias.unstage "reset HEAD --"
```

The `git config --global` command simply edits `~/.gitconfig`:

```
[alias]
unstage = reset head --
```

4.2. IGNORING BUILD ARTIFACTS

4.1.3 Some Useful Aliases

```
[alias]
b = branch -vv
s = status --short
ci = commit
co = checkout
ds = describe --long --tags --dirty --always
lg = log --pretty=format: '%Cgreen%h%Creset %Cred%cd%Creset %Cblue%ae%Creset %s %d'
sb = submodule
sbu = submodule update --init --recursive
sbp = submodule update --remote --checkout
unstage = reset head --
```

(Taken from the `examples/aliases.ini` file.)

4.1.4 Exercise: Create Some Aliases

Goal: Practice creating and using Git aliases as shortcuts for commonly used commands.

1. Take a moment and create some helpful aliases
2. Pick a repository and test your new aliases

4.2 Ignoring Build Artifacts

4.2.1 Why You May Want to Ignore Certain Files

There are several types of files you may want Git to ignore:

- Build artifact files (e.g., object files)
- Temporary files or directories
- Log files generated during testing

4.2.2 Telling Git to Ignore Files

- When you tell Git to ignore a file it will no longer show up in the `git status` listing as modified or untracked.
- Ignore files are listed in the `.gitignore` file as a list of file patterns

4.2.3 Ignoring Files Using Glob Patterns

Examples of various glob patterns you can use:

- Using a file extension glob (these match files at any directory depth):
 - *.o
 - *.a
- Anchoring a pattern to a specific directory (start with /):
 - /dist/*.o
 - /log/*.log
- Ignoring entire directories (end in /):
 - log/
 - /tmp/
- Remove a pattern from the ignore list (start with !):
 - !*.c

4.3 Saving Changes for Later Use (Stashing)

4.3.1 What is Stashing?

Stashing is for those times when you are in the middle of working but need to switch tasks. With stashing you can:

1. Save modifications to tracked files, new files, and staged changes
2. Safely clean your working directory
3. Come back later and restore the changes from step 1

4.3.2 Saving Work In Progress without Committing

The fastest way to save your work in progress and restore the three trees to HEAD:

```
$ git stash
```

This will leave you with a clean index and working directory.

(Note: You can use the `--message` option to name the new stash object. You can also use the `--all` option to capture ignored files.)

4.3.3 Listing and Recovering Stashes

List stashes:

```
$ git stash list
```

Restore the first stash (`stash@{0}`) and then delete it:

```
$ git stash pop
```

Restore the first stash without deleting it:

```
$ git stash apply
```

4.3.4 Exercise: Pushing and Popping the Stash

Goal: Practice using `git stash` to save and restore changes to the index and working directory.

1. Change to the directory holding a clone of the following repository:
`repos/conflicts.git`
2. Create a branch that starts off the `origin/feature` branch
3. Add a comment to the bottom of `main.c`
4. Create a new stash
5. Review the index and working directory state
6. Restore the stash that was previously created


Chapter 5

Branching

5.1 Branching Basics

Branching allows you to create a new line of development that can diverge from the main line. If desired, the two lines can be brought back together by the merging process.


5.1.1 Separate Lines of Development

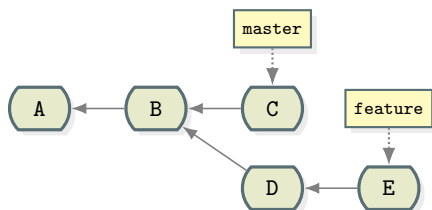

- Branches allow you to work independently of others
- The default branch in Git is called *master*
- Branches can be joined back together via *merging*


5.1. BRANCHING BASICS

5.1.2 What Branch Are You Using?

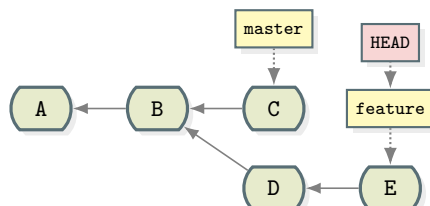

- Git uses a pointer called `HEAD` to track the current branch
- The `.git/HEAD` file references a branch's head
- A branch's head is its latest commit ID


5.1.3 How Do You Create a Branch?

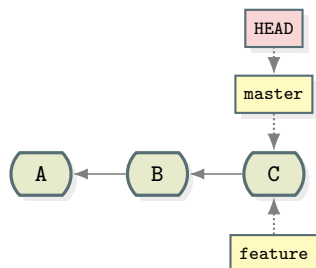

```
$ git branch feature
```

- Creates a branch called `feature`
- `HEAD` still points at `master`

5.1.4 How Do You Switch Branches?

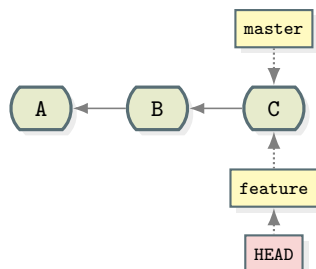

```
$ git checkout feature
```

- Changes where **HEAD** points
- (**HEAD** now points to the **feature** branch)

5.1.5 Exercise: Moving HEAD Around


Goal: Practice using `git checkout` to move the **HEAD** pointer.

1. Change to the directory holding a clone of the following repository:

```
repos/basic.git
```

2. List the names of all branches
3. For each branch:
 1. Check out the branch
 2. Use `git log --oneline` to find the latest commit hash


5.1.6 Creating and Switching Branches

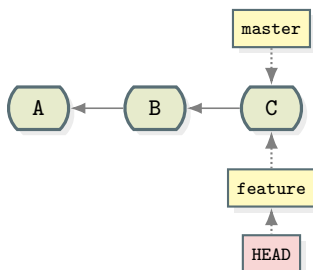

```
$ git checkout -b feature
```

- Create a **feature** branch
- And point **HEAD** at **feature**

5.1.7 Creating a Branch from a Revision

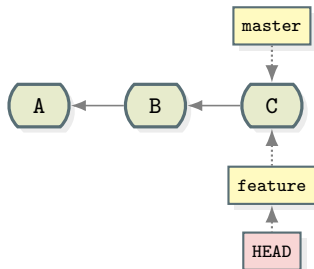

```
$ git checkout -b feature master
```

- Create a **feature** branch which starts at **master**
- And point **HEAD** at **feature**

5.1.8 Exercise: Creating Branches

Goal: Practice creating and switching branches.

1. Change to the directory holding a clone of the following repository:
`repos/basic.git`
2. Switch to the **master** branch
3. Create a new branch called **m2**
4. Use `git log` to see the latest commit:

```
$ git log --oneline -1
```
5. Create a branch called **f2** that starts at **merge-start**
6. Compare the latest commits on **m2** and **f2**

5.2 Listing Differences Between Branches

5.2.1 Viewing Files from Other Branches

Sometimes you just want to view a complete file the way it is on another branch (or revision). You can do that with `git show`:

```
$ git show master:main.c
# [file contents]
```



```
$ git show HEAD~:main.c
# [file contents]
```

Note: You can use the `--no-pager` option to `git` to dump the entire file to the terminal without using a pager.

5.2.2 Using `git diff` with Branch Names

See how files changed in `feature` compared to `master`:


```
$ git diff master..feature

::: {.notes}

diff --git a/main.c b/main.c
index f2cb756..cec0d5a 100644
--- a/main.c
+++ b/main.c
@@ -1,6 +1,11 @@
  #include <stdio.h>
+const char* version = "1.0";
+
+void print_version (void) {
+ printf("version %s\n", version);
+}

  int main (int argc, char** argv) {
- printf("%s\n", "Hello Everyone");
+ printf("%s\n", "hello");
    return 0;
  }
```

```
:::
- Compares the tip of master with the tip of feature
- Note: uses two dots (“..”)
- If master has diverged you need to compare specific revisions instead
### Using git diff with a Merge Base
```

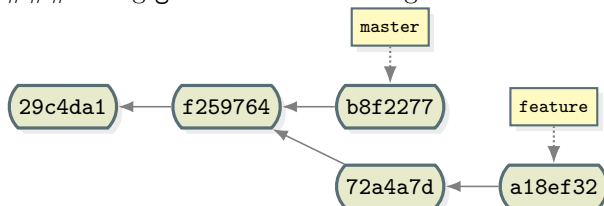


5.2. LISTING DIFFERENCES BETWEEN BRANCHES

```
{.shell} $ git merge-base feature master
f259764e2f5a16eae7b33a96a8fb5105df99cbfb $ git diff
f259764..feature
```

- Used when the base branch has diverged
- The `merge-base` subcommand locates the common ancestor
- Shortcut: `git diff master...feature` (Note: three dots)

Visualizing Branches

5.2.3 Using `git log` to Visualize Branches

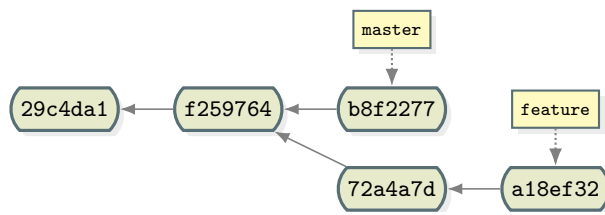


```
$ git log --oneline --abbrev-commit \
    --all --graph --decorate --color
```

```
* a18ef32 (feature) Add a missing newline character
* 72a4a7d Add a version number
| * b8f2277 (master) Add a proper greeting message
|/
* f259764 Indicate success by returning zero
* 29c4da1 Initial import of main.c
```

5.2.4 Using `gitk` to Visualize Branches

Sometimes it's easier to use a GUI:

```
$ gitk --all
```

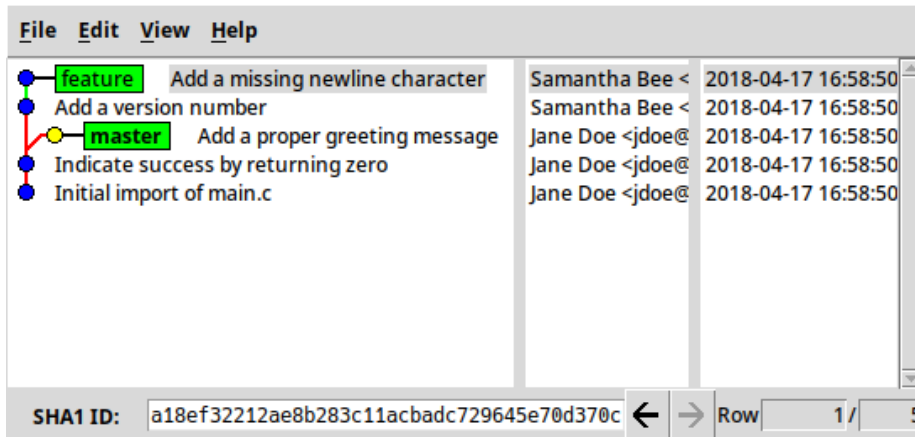

5.3 Deleting Branches

5.3.1 Safely Deleting Branches

If a branch has been pushed or merged it can be safely deleted:

```
$ git branch --delete feature
```

```
# or, the shortcut...
```

```
$ git branch -d feature
```

5.3.2 Deleting Branches with Extreme Prejudice

You can delete a branch without any safety checks:

```
$ git branch --delete --force feature
```

```
# beware of the shortcut:
```

```
$ git branch -D feature
```

5.3.3 Recreating a Deleted Branch

```
$ git branch -D feature
```

```
Deleted branch feature (was a18ef32).
```

5.4. TAGGING

```
$ git branch feature a18ef32
# branch is now restored
```

- As long as the deleted branch's commits have not been pruned by the garbage collector you can recover the branch.
- If the branch's previous HEAD shows up in the reflog (`git reflog`) then it will be expired in 90 days (the default)
- Use the command to see which commits are set to expire: `git fsck --lost-found`

5.3.4 Deleting Remote Branches

When you are completely done with a branch you may want to delete your local copy and any remote copies. Remote copies can be deleted with `git push`:

```
$ git push --delete origin feature
```

5.4 Tagging

5.4.1 What is a Tag?

- In Git a tag is a pointer to a specific commit object.
- Typically they are used for recording a software release and include details about who made the release.

5.4.2 Creating Tags

To create a tag that points to HEAD:

```
$ git tag <name>
```

For release you probably want to create an annotated tag:

```
$ git tag -a <name>
```

You can also:

- Sign a tag using your GPG private key
- Create a tag that points at any commit

5.4.3 Listing Tags

Once you have tags in your repository you can list them:

```
$ git tag --list
```

To list tags from a remote you can:

```
$ git ls-remote --tags <remote>
```

5.4.4 Deleting or Recreating Tags

Tags can be safely deleted when no longer needed:

```
$ git tag --delete <name>
```

If you absolutely must recreate an existing tag, and you understand the problems it might cause, you can:

```
$ git tag --force -a <name>
```

5.4.5 Branching from a Tag

Once a tag is created you can start a new branch off it:

```
$ git checkout -b <branch-name> <tag-name>
```

This is useful for creating a branch to fix a bug in a past release.

5.4.6 Pushing Tags

Which pushing branches to a remote Git will *not* push tags automatically. You must do it manually:

```
$ git push --tags
```

5.4.7 Exercise: Tagging the Current Commit

Goal: Practice creating tags and using the `git tag` tool to list them.

1. Change to the directory holding a clone of the following repository:

```
repos/basic.git
```
2. Create a tag called `v1.1`
3. Use `git tag --list` to list your tags
4. Try using `git rev-parse` to see how the tag name resolves

5.4. TAGGING

5. Create a branch starting from the tag
6. Push the tag back to the `origin` remote
7. Use `git ls-remote` to confirm the tags were pushed


Chapter 6

Merging

6.1 Merging Basics


Once work on a branch is completed you can introduce those changes into another branch through merging.

6.1.1 Merging Branches

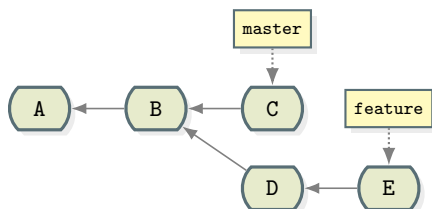


- Work on the **feature** branch is complete
- We would like commits D and E to move to the **master** branch
- We will do this through merging

6.1.2 Revisiting the Merge Base

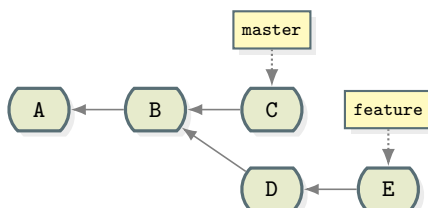

- The **feature** branch and **master** branch share a common ancestor
- That ancestor is commit B
- Git will perform a 3-way merge with B, C, and E
- The result is a commit with two parents

6.1.3 Merges Cause Multiple Parents

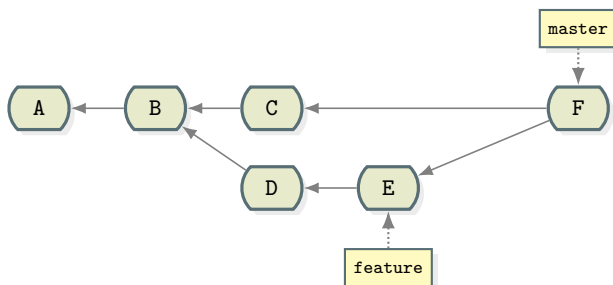

- A new commit is created: F
- This is called a *merge commit* and has two parents

6.1.4 Performing a Merge

1. Switch to the destination branch:

```
$ git checkout master
```

2. Merge in the other branch:

```
$ git merge feature
```

3. Write a commit message in your text editor

6.1.5 Exercise: Merging a Branch

Goal: Practice merging one branch into another and examining the resulting merge commit.

1. Change to the directory holding a clone of the following repository:

```
repos/basic.git
```

2. Create and switch to a new branch that starts at v1.0:

```
$ git checkout -b NAME v1.0
```

3. Merge the `origin/feature` branch into your new branch

6.2 Merge Conflicts

When the two branches you are merging have altered the same things, a merge conflict arises which you must manually resolve.

6.2.1 What is a Merge Conflict?

- You are merging two branches that changed the same thing
- Git doesn't assume one change is more important than the other
- The merge process is paused and you must resolve the issue
- After resolving issues, you resume the merge process

6.2.2 How Git Reports a Merge Conflict

```
$ git merge feature
Auto-merging main.c
CONFLICT (content): Merge conflict in main.c
Automatic merge failed; fix conflicts and then commit the result.
```

6.2.3 What `git status` Shows During a Conflict

```
On branch master
You have unmerged paths.
  (fix conflicts and run "git commit")
  (use "git merge --abort" to abort the merge)
```

```
Unmerged paths:
```

6.2. MERGE CONFLICTS

(use "git add <file>..." to mark resolution)

both modified: main.c

no changes added to commit (use "git add" and/or "git commit -a")

6.2.4 Merge Conflict Markers

```
int main (int argc, char** argv) {
<<<<<<< HEAD
    printf("%s\n", "Hello Everyone");
=====
    print_version();
    printf("%s\n", "Hello World!");
>>>>>>> feature
    return 0;
}
```

6.2.5 Resolving Merge Conflicts

1. Edit all files that are *unmerged*
2. Use `git add` to add them to the index
3. Finish the merge by using `git commit`

6.2.6 Exercise: Merging with Conflicts

Goal: Practice resolving conflicts when merging one branch into another.

1. Change to the directory holding a clone of the following repository:

```
repos/conflicts.git
```

2. Create and switch to a new branch that starts at v1.0:

```
$ git checkout -b NAME v1.0
```

3. Merge the `origin/feature` branch into your new branch
4. Resolve conflicts and finish the merge

6.3 Merging Remote Branches

6.3.1 Merging a Remote Branch into HEAD

Let's say you want to merge `origin/master` into `master`:

```
$ git pull origin master
```

Or more simply:

```
$ git pull
```

Which is a shortcut for:

```
$ git fetch origin
```

```
$ git merge origin/master
```


Chapter 7

Remote Repositories

7.1 Remote Repositories

7.1.1 Listing Remotes

- When you clone a repository it will have one remote by default: *origin*
- The origin remote points back to the original clone URL
- You can list remotes with the following command:


```
$ git remote -v show
```

7.1.2 Exercise: Listing Remotes

1. Go into any repository that we've used today
2. List the remotes for that repository
3. What does the `-v` flag do?


7.1.3 Typical Remote Setup

Remote Server

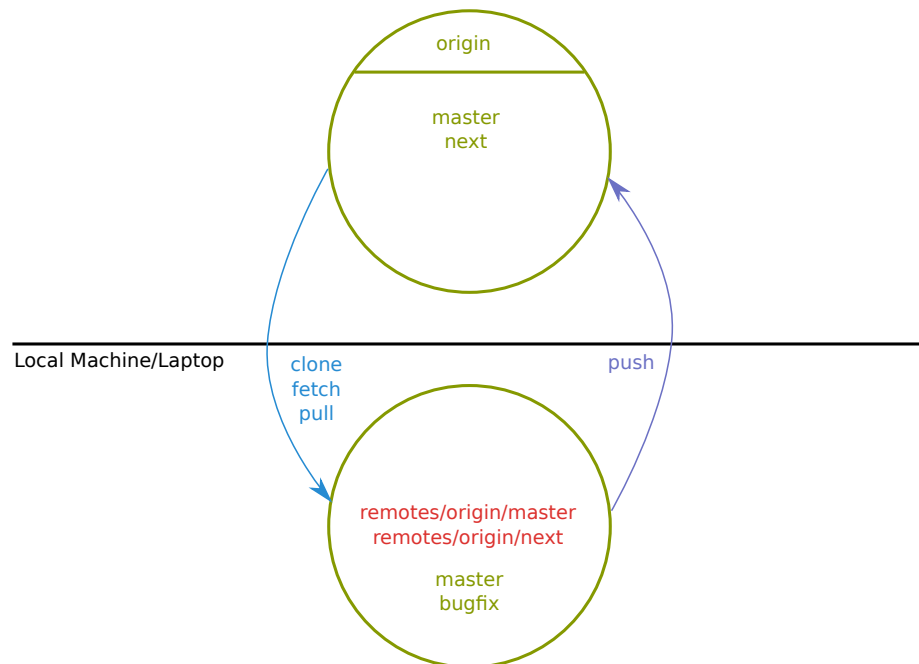

7.1.4 Dual Remote Setup (Fork)

Remote Server

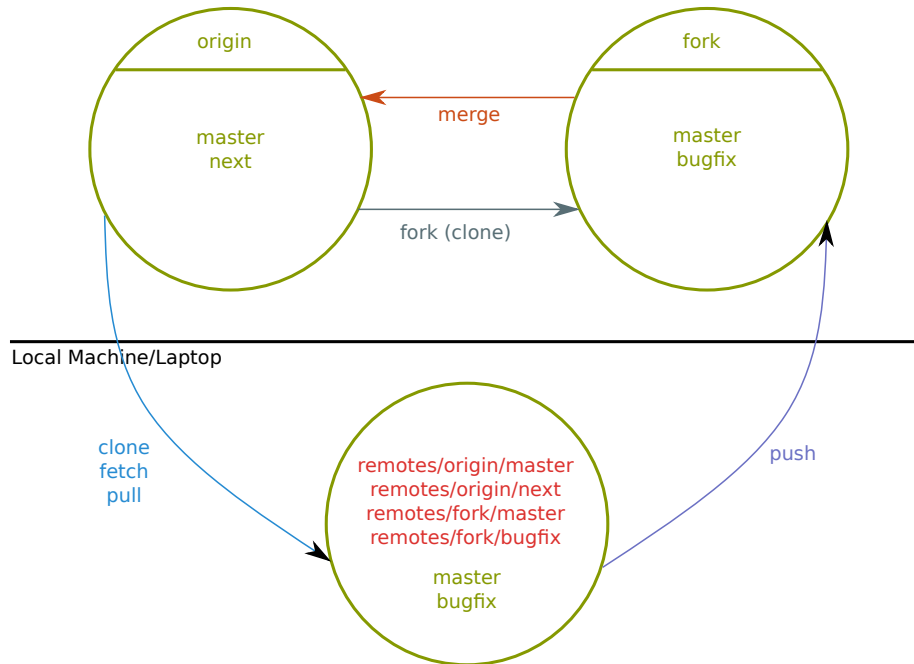

7.1.5 Adding Remotes

It's common to have more than one remote. To add another remote you:

```
$ git remote add <name> <url>
```

Reasons to have additional remotes:

- Pull from a coworker's repo
- Backup your repository without pushing to the central one
- Creating a pull request on an open source project

7.1.6 Renaming and Removing Remotes

You can rename a remote:

```
$ git remote rename <old> <new>
```

or completely remove a remote from your repository:

```
$ git remote remove <name>
```

7.2 Synchronizing Objects with Remotes

7.2.1 Fetching Objects from a Remote

You can fetch all objects from a remote by:

```
$ git fetch <remote>
```

(Note: this fetches objects and places them in the repository but does not change any branches.)

7.2.2 Fetching and Updating Branches

If you want to fetch objects from a remote and then update your branch to match upstream you have two choices:

1. Fetch and then merge:

```
$ git fetch <remote>
$ git merge origin/master
```

2. Use `git pull`:

```
$ git pull origin master
```

(Note: if you are on a tracking branch you can use `git pull` without any arguments.)

7.2.3 Pushing Objects to Remotes

To publish your changes to a remote you can:

```
$ git push origin master
```

This pushes your changes to the origin server's `master` branch.

(Note: if you are on a tracking branch you can use `git push` without any arguments.)


7.2.4 Pushing Tags to Remotes

Using `git push` won't send your tags to the remote by default. You have to use the `--tags` flag:

```
$ git push --tags origin
```


7.3 Tracking Branches

7.3.1 What is a Tracking Branch?

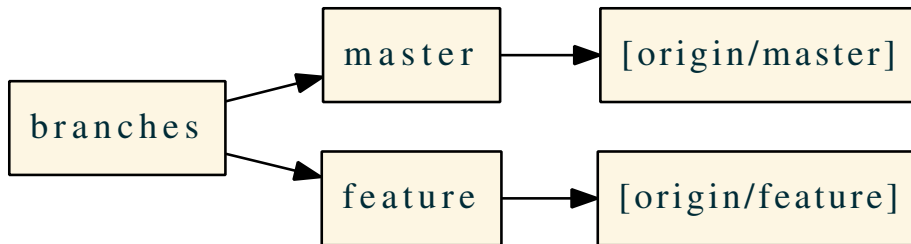

A *tracking branch* is branch that is linked to a specific remote repository.

7.3.2 Creating Tracking Branches

If you `git checkout` a branch that has the same name as a remote branch it will automatically track the remote branch:

```
$ git branch --all
* master
  remotes/origin/HEAD -> origin/master
  remotes/origin/feature
  remotes/origin/master
$ git checkout feature
Branch 'feature' set up to track remote branch 'feature' from 'origin'.
```

7.3.3 Manually Creating Tracking Branches

You can manually create a branch and set its tracking information:

```
$ git checkout -b ft origin/feature
Branch 'ft' set up to track remote branch 'feature' from 'origin'.
```

7.3.4 Getting Tracking Information

To see tracking information for local branches:

```
$ git branch -vv
* master 7f86f19 [origin/master] Add a proper greeting message
```

7.3.5 Setting Tracking Information

To change the tracking information for the current branch:

```
$ git branch -u origin/master  
Branch 'master' set up to track remote branch 'master' from 'origin'.
```


Chapter 8

Centralizing and Controlling Access

8.1 Introduction to GitLab

8.1.1 What is GitLab?



GitLab is a repository hosting and project management platform.

8.1.2 Project Management Features

- Git repository hosting (one per project)
- Issue tracking (bug reports, request features, etc.)
- User administration (i.e., who can work in a project)
- Developer workflow management (i.e., branching and merge requests)
- Milestone tracking and reporting
- A bunch of other stuff. . .

8.2 Git Repositories on GitLab

8.2.1 Project Repositories

- Each project has its own Git repository
- The repository can be managed from the web interface
- The user interface prominently displays the clone URL
- We'll talk more about cloning and forking in a bit

8.2.2 User-Friendly Git Interface

From the web interface you can:

- View a Git commit log and easily get more details
- Create branches for working on specific issues
- Edit files and commit them to the repository
- Visualize the branch history of a project
- Manage branches: merge, rebase, delete, etc.

8.2.3 Forking vs. Cloning

- Cloning is how you create a local copy of an existing repository
- A fork is just a clone of the primary repository that stays on the remote server

8.3. DAILY WORKFLOW

- Forking is often used to have a private remote to push to
- You can merge a branch from a fork back into the primary repository

8.2.4 Accessing a Repository via SSH

SSH is the most common way to access a remote repository. To use SSH you:

1. Create a SSH key pair on your local machine (a key pair is made up of a public key and a private key)
2. Configure your computer to use your SSH private key (usually you run something called an **ssh-agent** to cache your private key)
3. Upload your SSH public key using the web interface

Once set up properly, Git will connect to the remote using SSH and use your private key to authenticate.

8.3 Daily Workflow

8.3.1 Branching and Forking

When working on a bug fix or a new feature you have several options:

- Clone the main repository and create a topic branch
- Fork the main repository, clone the fork, then create a topic branch

Both methods give you an independent space for working.

(Note: Your company may prefer one method over the other. The primary repository is generally configured to disallow pushing directly to the **master** branch.)

8.3.2 Creating Pull/Merge Requests

When you have completed your work:

1. Make sure you have pushed your branch up to the remote
2. Sign in to the web interface and go to the original project
3. Create a new *pull request* or *merge request*
4. Wait for a team lead/member to merge your branch

8.3.3 Pull/Merge Request Details

When creating a pull/merge request you have several options you must specify:

- What branch do you want to merge into? (This is the destination branch.)
- Should the source branch be deleted after the merge?
- Should all commits in the source branch be squashed prior to the merge?
- Does the source branch need to be rebased so it will merge cleanly?